

FK5521.230

FK5521.300



IP54

CE

RoHS

-30 ~ +70 °C

规格

风扇过滤器型号	FK5521.230	FK5521.115	FK5521.024
额定电压	200V-240V AC	100-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	25/35m³/h	25/35m³/h	35m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5521.300:22/28m³/h		
轴流风机	自启动罩极电机		
额定电流	0.09A/0.08A	0.16A/0.14A	0.085A
功率	13/12W	13/12W	2.04W
噪音水平	28/32dB(A)	28/32dB(A)	36dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5521.300	FK5521.300	FK5521.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



曲线格栅设计






优质密封垫



高品质过滤棉

尺寸图(mm)



FK5522.230

FK5522.300



IP54

CE

RoHS

-30 ~ +70

规格

风扇过滤器型号	FK5522.230	FK5522.115	FK5522.024
额定电压	200V-240V AC	100-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	65/85m³/h	65/85m³/h	100m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5522.300:55/70m³/h		
轴流风机	自启动罩极电机		
额定电流	0.12A/0.11A	0.24A/0.22A	0.20A
功率	19/18W	19/18W	4.8W
噪音水平	41/42dB(A)	41/42dB(A)	41dB(A)
过滤器工作范围	-30°C ~ +70°C	-30°C ~ +70°C	-30°C ~ +70°C
出口过滤器型号	FK5522.300	FK5522.300	FK5522.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



曲线格栅设计







优质密封垫



高品质过滤棉

尺寸图(mm)



FK5523.230

FK5523.300



IP54

CE

RoHS

-30 ~ +70 °C

规格

风扇过滤器型号	FK5523.230	FK5523.115	FK5523.024
额定电压	200V-240V AC	100-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	105/126m³/h	105/126m³/h	126m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5523.300:78/90m³/h		
轴流风机	自启动罩极电机		
额定电流	0.12A/0.11A	0.24A/0.22A	0.20A
功率	19/18W	19/18W	4.8W
噪音水平	41/42dB(A)	41/42dB(A)	41dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5522.300	FK5522.300	FK5522.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



曲线格栅设计







优质密封垫



高品质过滤棉

尺寸图(mm)





FK5524.230



FK5524.300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	FK5524.230	FK5524.115	FK5524.024
额定电压	200V-240V AC	100V-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	220/240m³/h	220/240m³/h	300m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5524.300:155/185m³/h		
轴流风机	自启动罩极电机		
额定电流	0.24A/0.22A	0.45A/0.42A	0.50A
功率	38/36W	38/36W	12W
噪音水平	50/52dB(A)	50/52dB(A)	50dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5524.300	FK5524.300	FK5524.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



曲线格栅设计






优质密封垫



高品质过滤棉

尺寸图(mm)

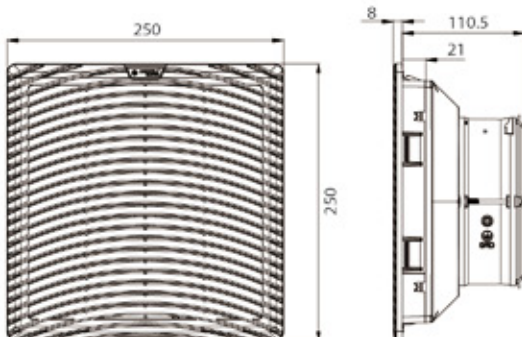

FK5524-S.230

FK5525.300



IP54

CE

RoHS

-30 ~ +70 °C

规格

风扇过滤器型号	FK5524-S.230	FK5524-S.115	FK5524-S.024
额定电压	200V-240V AC	100-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	105/126m³/h	105/126m³/h	126m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5525.300:78/90m³/h		
轴流风机	自启动罩极电机		
额定电流	0.12A/0.11A	0.24A/0.22A	0.20A
功率	19/18W	19/18W	4.8W
噪音水平	41/42dB(A)	41/42dB(A)	41dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5525.300	FK5525.300	FK5525.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



曲线格栅设计






优质密封垫



高品质过滤棉

尺寸图(mm)




FK5525.230




FK5525.300

IP54
CE
RoHS
-30 +70
规格

风扇过滤器型号	FK5525.230	FK5525.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	230/265m³/h	230/265m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5525.300:190/215m³/h	
轴流风机	电容电机	
额定电流	0.22A/0.20A	0.45A/0.50A
功率	37/35W	37/35W
噪音水平	50/52dB(A)	50/52dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5525.300	FK5525.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	


曲线格栅设计

优质密封垫

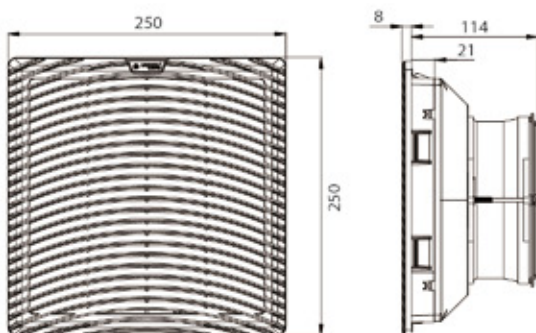高品质过滤棉
尺寸图(mm)


FK5525-D.230

FK5525.300



IP54

CE

RoHS

-30 ~ +70 °C

规格

风扇过滤器型号	FK5525-D.230	FK5525-D.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	330/370m³/h	330/370m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5525.300:231/259m³/h	
轴流风机	电容电机	
额定电流	0.22A/0.20A	0.45A/0.50A
功率	37/35W	37/35W
噪音水平	50/52dB(A)	50/52dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5525.300	FK5525.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



曲线格栅设计






优质密封垫



高品质过滤棉

尺寸图(mm)



FK5525-E.230

FK5525.300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	FK5525-E.230	FK5525-E.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	420/430m³/h	420/430m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5525.300:294/301m³/h	
轴流风机	电容电机	
额定电流	0.22A/0.20A	0.45A/0.50A
功率	37/35W	37/35W
噪音水平	50/52dB(A)	50/52dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5525.300	FK5525.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



曲线格栅设计






优质密封垫



高品质过滤棉

尺寸图(mm)

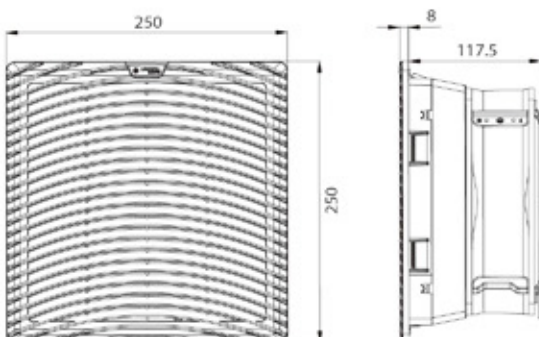

FK5525-F.230

FK5525.300



IP54

CE

RoHS

-30 ~ +70 °C

规格

风扇过滤器型号	FK5525-F.230	FK5525-F.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	700/750m³/h	700/750m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5525.300:490/525m³/h	
轴流风机	电容电机	
额定电流	0.22A/0.20A	0.45A/0.50A
功率	37/35W	37/35W
噪音水平	50/52dB(A)	50/52dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5525.300	FK5525.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



曲线格栅设计





优质密封垫



高品质过滤棉

尺寸图(mm)





FK5526.230



FK5526.300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	FK5526.230	FK5526.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	550/600m³/h	550/600m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK5526.300:380/410m³/h	
轴流风机	电容电机	
额定电流	0.30A/0.35A	0.55A/0.65A
功率	55/65W	55/65W
噪音水平	62/65dB(A)	62/65dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5526.300	FK5526.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



曲线格栅设计







优质密封垫



高品质过滤棉

尺寸图(mm)



FK5527.230

FK5526.300



IP54

CE

RoHS

-30 ~ +70 °C

规格

风扇过滤器型号	FK5527.230	FK5527.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	380/400m³/h	
空气流量, 配出口过滤器、标准过滤垫	1×FK5526.300:248/260m³/h	
轴流风机	电容电机	
额定电流	0.35A/0.32A	0.58A/0.54A
功率	45/42W	45/42W
噪音水平	63/65dB(A)	63/65dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5526.300	FK5526.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



曲线格栅设计






优质密封垫



高品质过滤棉

尺寸图(mm)

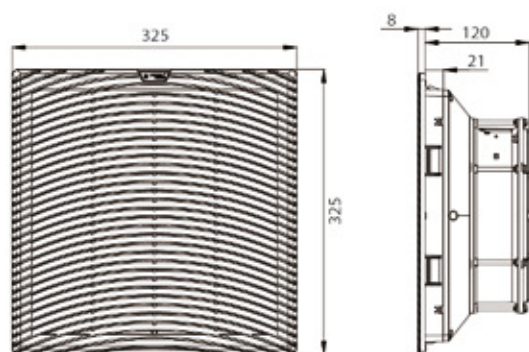



FK5528.230



FK5526.300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	FK5528.230	FK5528.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	1150/1350m ³ /h	
空气流量, 配出口过滤器、标准过滤垫	1×FK5526.300:750/950m ³ /h	
轴流风机	电容电机	
额定电流	0.55A/0.65A	1.0A/1.1A
功率	110/150W	110/150W
噪音水平	68/71dB(A)	68/71dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK5526.300	FK5526.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



曲线格栅设计




优质密封垫



高品质过滤棉

尺寸图(mm)

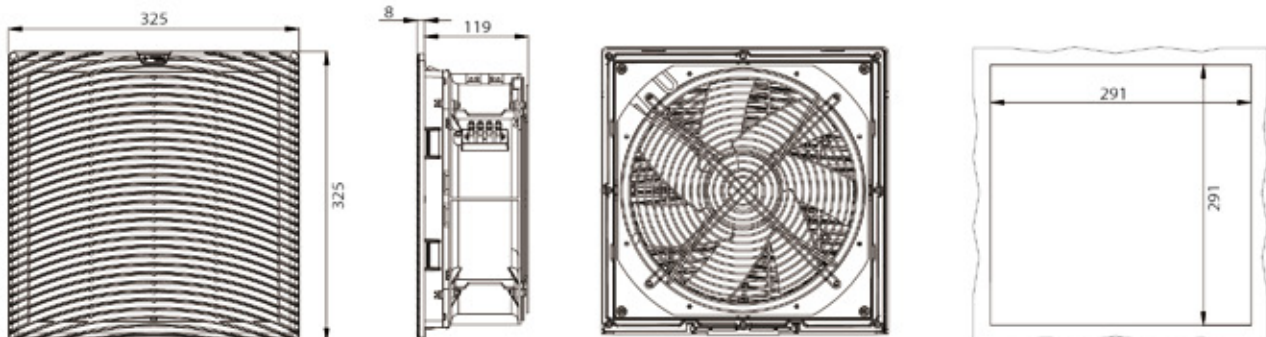

FK5529.230

FK5526.300



IP54

CE

RoHS

-30 ~ +70 °C

规格

风扇过滤器型号	FK5529.230	FK5529.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	1150/1350m³/h	
空气流量, 配出口过滤器、标准过滤垫	1×FK5526.300:750/950m³/h	
轴流风机	电容电机	
额定电流	0.55A/0.65A	1.0A/1.1A
功率	110/150W	110/150W
噪音水平	68/71dB(A)	68/71dB(A)
过滤器工作范围	-30°C ~ +70°C	-30°C ~ +70°C
出口过滤器型号	FK5526.300	FK5526.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



曲线格栅设计



优质密封垫



高品质过滤棉

尺寸图(mm)

